

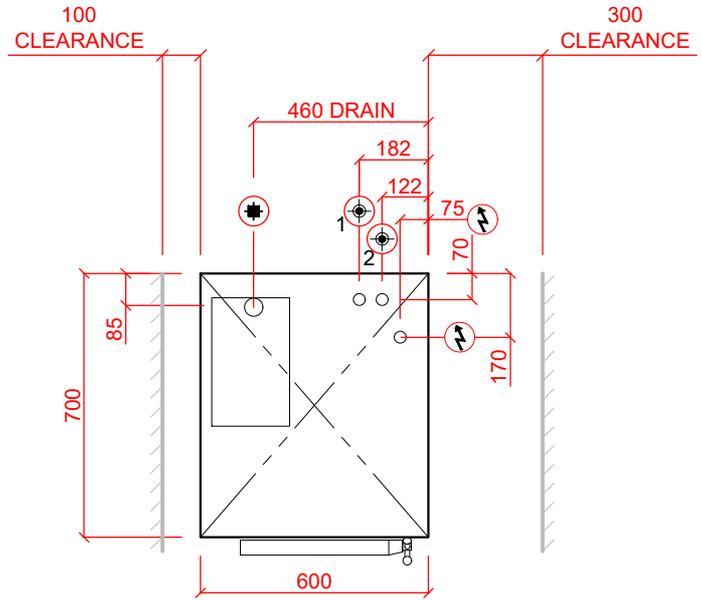
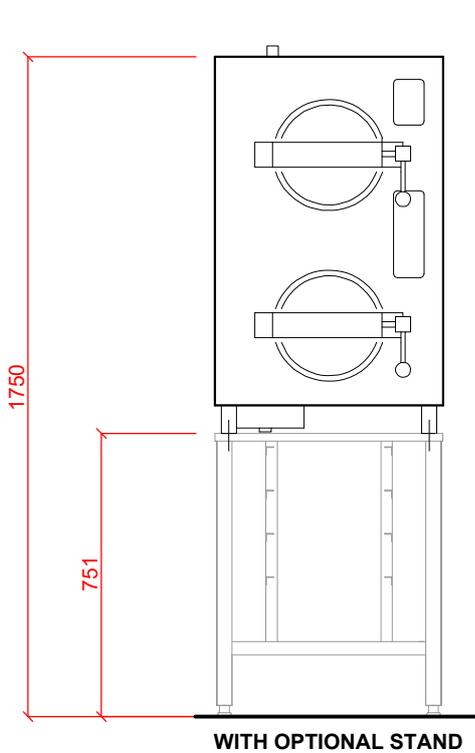


PRESSURE STEAMERS

2228B-10

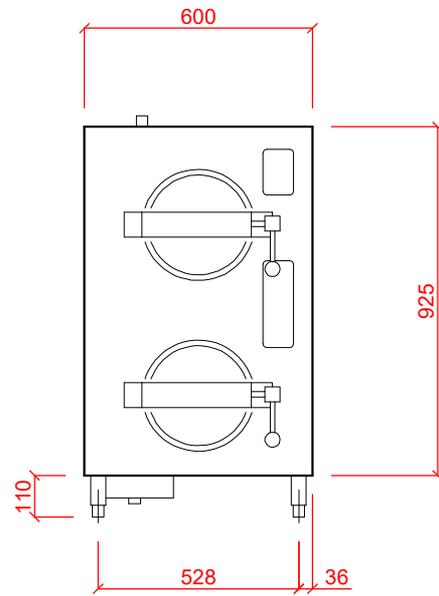

PLAN VIEW SHOWING SERVICE LOCATIONS AND RECOMMENDED CLEARANCES

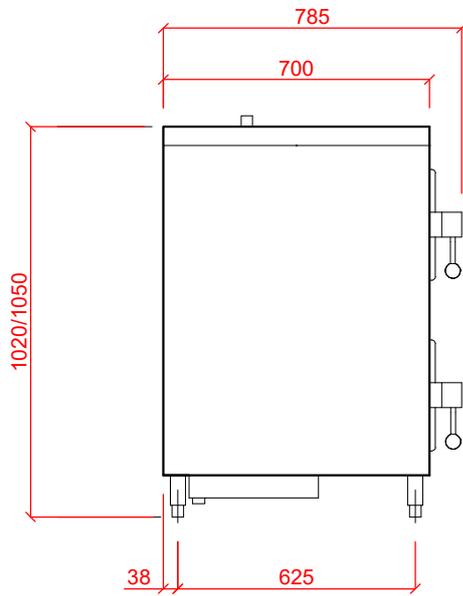

SPECIAL NOTE:

RECOMMENDED TO BE USED WITH A WATER TREATMENT SYSTEM.

COOKING PRESSURE - 0, 0.5 and 1.0 Bar

THERMAL RADIATION - APPROXIMATELY 1.5 kW AT DOOR, BUT REMAINDER NEGLIGIBLE AS MACHINE HAS INSULATED PANELS.

| Device Number | Description | Electric | Notes |
|-----------------|---|---|---|
| 2228B-10 | Pressure Steamer Double Chamber to suit 2 x 1/2 GN pan 100mm deep. | 400/50/3 + N + E 27.0kW (switchable to 18kW) Fuse at 50A/phase(32A/phase) | ELECTRICAL CONNECTION 1 SOFT WATER INLET 3/4" BSP 2 WATER INLET 3/4" BSP DRAIN 1" BSP WATER CONDENSE BOX 3/4" BSP <p><small>NOTE: Water Inlet Pressure min 1.7bar max 10bar Water supply is via internal WRAS approved valve.</small></p> <p style="text-align: right;"><small>EST WEIGHT 88Kgs ALL SERVICES ENTER FROM BELOW UNIT</small></p> |